

## TRANSMITTAL LETTER TO THE UNITED STATES

1695

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

09/914967

INTERNATIONAL APPLICATION NO.

PCT/DE 00/00431

INTERNATIONAL FILING DATE

FEBRUARY 15, 2000

PRIORITY DATE CLAIMED

MARCH 8, 1999

## TITLE OF INVENTION

METHOD FOR ALLOCATING RIGHTS OF ACCESS TO A TELECOMMUNICATIONS CHANNEL TO  
SUBSCRIBER STATIONS OF A TELECOMMUNICATIONS NETWORK, AND SUBSCRIBER STATION

## APPLICANT(S) FOR DO/EO/US

Ralf FISCHER, Martin HANS, Frank KOWALEWSKI, Josef LAUMEN, Gunnar SCHMIDT, Detlef LECHNER,  
Holger SCHULZ

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

## Items 13 to 18 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.  
A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☒ Certificate of Mailing by Express Mail
19. ☐ Other items or information:

ET 473368295US

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/914967

INTERNATIONAL APPLICATION NO.

PCT/DE 00/00431

ATTORNEY'S DOCKET NUMBER

1695

20. The following fees are submitted:

**BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5)) :**

- ☐ Search Report has been prepared by the EPO or JPO ..... \$930.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) ..... \$720.00
- ☐ No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) ..... \$790.00
- ☒ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$1,070.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) ..... \$98.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

\$1,000.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

\$0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	11 - 20 =	0	x \$18.00
Independent claims	1 - 3 =	0	x \$80.00

\$0.00

\$0.00

Multiple Dependent Claims (check if applicable). ☐

\$0.00

**TOTAL OF ABOVE CALCULATIONS =**

\$1,000.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐

\$0.00

**SUBTOTAL =**

\$1,000.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

\$0.00

**TOTAL NATIONAL FEE =**

\$1,000.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☒

\$40.00

**TOTAL FEES ENCLOSED =**

\$1,040.00

Amount to be:  
refunded \$  
charged \$

- ☐ A check in the amount of \_\_\_\_\_ to cover the above fees is enclosed.
- ☒ Please charge my Deposit Account No. **19-4675** in the amount of **\$1,040.00** to cover the above fees.  
A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **19-4675** A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

**STRIKER, STRIKER & STENBY**  
103 EAST NECK ROAD  
HUNTINGTON, NEW YORK 11743

SIGNATURE

**MICHAEL J. STRIKER**

NAME

27233

REGISTRATION NUMBER

SEPTEMBER 6, 2001

DATE

**UNITED STATES PATENT AND TRADEMARK OFFICE**

*In re:*

*Applicant:* FISCHER

*Serial No.:*

*Filed:*

*For:* METHOD FOR ALLOCATING  
RIGHTS...

***PRELIMINARY AMENDMENT***

September 6, 2001

Hon. Commissioner of  
Patents and Trademarks  
Washington, D.C. 20231

Sir:

Preliminarily to the issuance of an Office Action in the above  
identified application, please amend the same as follows:

In the specification:

Please amend the specification as attached.

In the claims:

Cancel all claims without prejudice.

Add the following claims as attached.

### REMARKS

This Amendment is submitted preliminarily to the issuance of an Office Action in the above identified application.

With the present Amendment, applicants have amended the specification to bring it in compliance with the requirements of the U.S. Patent Practice.

The original claims have been canceled and replaced with a new set of claims 12-24. These claims correspond to the claims of the PCT application no. PCT/DE00/0431 and have been drafted in accordance with the U.S. Patent Practice.

Consideration and allowance of present application is most respectfully requested.

Should the Examiner require or consider it advisable that the specification, claims and/or drawings be further amended or corrected in formal respects in order to place this case in condition for final allowance, then it is respectfully requested that such amendments or corrections be

carried out by Examiner's Amendment, and the case be passed to issue. Any costs involved should be charged to the deposit account of the undersigned (No. 19-4675). Alternatively, should the Examiner feel that a personal discussion might be helpful in advancing this case to allowance, he is invited to telephone the undersigned (at 631-549-4700).

Respectfully submitted,

  
Michael J. Striker  
Attorney for Applicants  
Reg. No. 27233

In the specification:

Page 1, line 5, change the heading "Prior Art" to -- Background of the Invention --.

Page 1, line 19, change the heading "Advantages of the Invention" to -- Summary of the Invention --.

Page 4, line 24, change the heading "Drawing" to -- Brief Description of the Drawings --.

Page 5, line 11, change the heading "Description of the Exemplary Embodiments" to -- Description of the Preferred Embodiments --.

Please amend first paragraph on page 1 as follows:

The invention is based on a method of controlling or administering access to a telecommunications channel for a subscriber station[, as generally defined by the preamble to the independent claims].

Please amend the paragraph bridging pages 1 and 2 as follows:

The method of the invention and the subscriber station of the invention[, having the characteristics of the independent claims,] have the advantage over the prior art that with the information signals, access authorization data are transmitted to the at least one subscriber station; that upon reception of the access authorization data in an evaluation unit of the at least one subscriber station, the question is asked whether the access authorization data include an access threshold value, and the access threshold value is compared with a random number or a pseudo-random number; and that the right of access to a telecommunications channel of the at least one subscriber station is granted as a function on the outcome of comparison, preferably on the condition that the random number or the pseudo-random number is greater than or equal to the access threshold value. In this way, a random distribution of the access authorization to this telecommunications channel for one or more subscriber stations can be achieved. This access control takes up a minimum of transmission capacity for transmitting the information signals, since it is effected merely by transmitting the access threshold value.

Please cancel second in paragraphs in lines 9-11 on page 2.

Amended first paragraph on page 1:

The invention is based on a method of controlling or administering access to a telecommunications channel for a subscriber station.

amended paragraph bridging pages 1 and 2:

The method of the invention and the subscriber station of the invention have the advantage over the prior art that with the information signals, access authorization data are transmitted to the at least one subscriber station; that upon reception of the access authorization data in an evaluation unit of the at least one subscriber station, the question is asked whether the access authorization data include an access threshold value, and the access threshold value is compared with a random number or a pseudo-random number; and that the right of access to a telecommunications channel of the at least one subscriber station is granted as a function on the outcome of comparison, preferably on the condition that the random number or the pseudo-random number is greater than or equal to the access threshold value. In this way, a random distribution of the access authorization to this telecommunications channel for one or more

subscriber stations can be achieved. This access control takes up a minimum of transmission capacity for transmitting the information signals, since it is effected merely by transmitting the access threshold value.

## CLAIMS

New claims:

12. A method for allocating rights of access to at least one telecommunications channel usable by a plurality of subscriber stations in common, of a telecommunications network to at least one subscriber station (5, 10, 15, 20) of a telecommunications network, comprising the steps of transmitting information signals to at least one subscriber station (5, 10, 15, 20); transmitting with the information signals, access authorization data 45, 50, 55 to the at least one subscriber station (5, 10, 15, 20); upon reception of the access authorization data (45, 50, 55) in an evaluation unit (6) of the at least one subscriber station (5, 10, 15, 20), asking a question whether the access authorization data (45, 50, 55) include an access threshold value (S), and comparing the access threshold value (S) with a random number of a pseudo-random number (R); and granting a right of access to a telecommunications channel of the at least one subscriber station (5, 10, 15, 20) as a function of an outcome of the comparison.

13. A method as defined in claim 12; and further comprising granting the right of access as a function of the outcome of comparison on

a condition that the random number or the pseudo-random number (R) is greater than or equal to the access threshold value (S).

14. A method as defined in claim 12; and further comprising asking in the evaluation unit of the at least one subscriber station (5, 10, 15, 20) a question whether the access authorization data (45, 50, 55) include access authorization information (S0, S1, S2, S3, S4, Z0, Z1, Z2, Z3) with access class information (Z0, Z1, Z2, Z3) for at least one predetermined user class (35, 40) in which case and on a condition that the at least one subscriber station (5, 10, 15, 20) is assigned to an at least one predetermined user class (35, 40) to which access to at least one telecommunication channel of the at least one subscriber station (5, 10, 15, 20) is granted as a function of the access class information (Z0, Z1, Z2, Z3) for this user class (35, 40).

15. A method as defined in claim 12; and further comprising asking in an evaluation unit (60) of the at least one subscriber station (5, 10, 15, 20) a question whether the access authorization data (45, 50, 55) include priority information in form of a priority threshold value (P), in which case and on a condition that the at least one subscriber station (5, 10, 15, 20) is assigned to a pk (80, 85) with a priority value, comparing the priority value

with the priority threshold value (P), and granting an access to a telecommunication channel of the at least one subscriber station (5, 10, 15, 20) as a function of an outcome of the comparison.

16. A method as defined in claim 15, wherein said granting the access to a telecommunication channel as a function of the outcome of the comparison is performed on a condition that the priority value is greater than or equal to the priority threshold value (P).

17. A method as defined in claim 12; and further comprising asking an evaluation unit (60) of the at least one subscriber station (5, 10, 15, 20) a question whether the access authorization data (45, 50, 55) include telecommunications service information (D0, D1, D2), which for telecommunications services offered by the telecommunications network indicate whether the access to at least one telecommunications channel for use, or a request for such a telecommunications surface is enabled.

18. A method as defined in claim 12; and further comprising asking an evaluation unit (60) of the at least one subscriber station (5, 10, 15, 20) a question whether the access authorization data (45, 50, 55) include an item of access information (S4) which indicates whether the access

authorization data (45, 50, 55) are evaluated as an access threshold value (S), as an access channel information (ZO, Z1, Z2, Z3) as a priority threshold value (P), and/or as telecommunications service information (D0, D1, D2).

19. A method as defined in claim 12; and further comprising asking an evaluation unit (60) of the at least one subscriber station (5, 10, 15, 20) a question whether the access authorization data (45, 50, 55) include an item of access information (S4), which indicates whether the access authorization data (45, 50, 55) include either an access threshold value (S) or access channel information (ZO, Z1, Z2, Z3), and evaluating the access authorization data (45, 50, 55) in accordance with an answer to the question in the at least one subscriber station (5, 10, 15, 20).

20. A method as defined in claim 12; and further comprising transmitting the access authorization data (45, 50, 55) as bit patterns.

21. A method as defined in claim 20; and further comprising providing in the at least one telecommunication channel at least partly a nonselective access class (30).

22. A method as defined in claim 12; and further comprising transmitting the information signals to the at least one subscriber station (5, 10, 15, 20) via at least one signaling channel (25).

23. A method as defined in claim 12; and further comprising enabling the access to at least one communication channel of the at least one subscriber station (5, 10, 15, 20) as a function of an incidence of message traffic on at least one telecommunication channel.

24. A subscriber station to which an access to at least one telecommunication channel usable by a plurality of subscriber stations in common can be granted, comprising means for receiving information signals; an evaluation unit (60) for asking when information signals with access authorization data means (65) as authorization data (45, 50, 55) are received, whether the access authorization data (45, 50, 55) include an access threshold value (S) for comparison of the access threshold value (S) with a random number or a pseudo-random number (R), and for ascertaining, as a function of an outcome of a comparison, on a condition that the random number or the pseudo-random number is greater than or equal to the access threshold value (S) whether an access of the at least one

subscriber station (5, 10, 15, 20) to the at least one telecommunications channel is enabled.

3/pr/s

METHOD FOR ALLOCATING RIGHTS OF ACCESS TO A TELECOMMUNICATIONS  
CHANNEL TO SUBSCRIBER STATIONS OF A TELECOMMUNICATIONS NETWORK,  
AND SUBSCRIBER STATION

5 Prior Art

10 The invention is based on a method of controlling or  
administering access to a telecommunications channel for a  
subscriber station, as generically defined by the preamble to the  
independent claims.

15 From German Patent Application Serial No. 19838832.2, not  
yet published by the priority date of the present application, a  
method for controlling access to a telecommunications channel of  
a telecommunications network for at least one subscriber station  
of the telecommunications network is known in which information  
signals are transmitted to the at least one subscriber station.

20 Advantages of the Invention

25 The method of the invention and the subscriber station of  
the invention, having the characteristics of the independent  
claims, have the advantage over the prior art that with the  
information signals, access authorization data are transmitted to  
the at least one subscriber station ; that upon reception of the  
access authorization data in an evaluation unit of the at least  
one subscriber station, the question is asked whether the access  
authorization data include an access threshold value, and the  
access threshold value is compared with a random number or a  
30 pseudo-random number; and that the right of access to a  
telecommunications channel of the at least one subscriber station  
is granted as a function of the outcome of comparison, preferably  
on the condition that the random number or the pseudo-random

number is greater than or equal to the access threshold value.  
In this way, a random distribution of the access authorization to  
this telecommunications channel for one or more subscriber  
stations can be achieved. This access control takes up a minimum  
5 of transmission capacity for transmitting the information  
signals, since it is effected merely by transmitting the access  
threshold value.

By the provisions recited in the dependent claims,  
10 advantageous refinements of and improvements to the method  
defined by independent claim 1 are possible.

It is especially advantageous that in the evaluation unit of  
the at least one subscriber station, the question is asked  
15 whether the access authorization data include access  
authorization information with access class information for at  
least one predetermined user class, in which case, and on the  
condition that the at least one subscriber station is assigned to  
the at least one predetermined user class, to which access to a  
20 telecommunications channel of the at least one subscriber station  
is granted as a function of the access class information for this  
user class. In this way, subscriber stations of a predetermined  
user class are allowed to use the telecommunications channel even  
whenever, on the basis of the random distribution by means of the  
25 access threshold value are not authorized access to this  
telecommunications channel. For instance, subscriber stations of  
emergency services, such as the police or fire department are  
assigned to a predetermined user class of this kind and can then  
access the telecommunications channel with priority by means of  
30 appropriate access threshold value ink, independently of the  
random distribution.

A further advantage is that in the evaluation unit of the at  
least one subscriber station, the question is asked whether the  
35 access authorization data include priority information in the

form of priority threshold value, in which case and on the condition that the at least one subscriber station is assigned to a pk with a priority value, the priority value is compared with the priority threshold value, and the access to a telecommunications channel of the at least one subscriber station is granted as a function of the outcome of the comparison, preferably on the condition that the priority value is greater than or equal to the priority threshold value. In this way, among the subscriber stations randomly authorized to access this telecommunications channel, a further selection is additionally made, which prefers subscriber stations of higher priority for the access to this telecommunications channel. In this way again, subscriber stations of emergency services such as the police or fire department are given priority, although as a function of the random distribution by means of the access threshold value.

A further advantage is that in the evaluation unit of the at least one subscriber station, the question is asked whether the access authorization data include telecommunications service information, which for telecommunications services offered by the telecommunications network indicate whether the access to at least one telecommunications channel for requesting such a telecommunications service is enabled. For each of the user classes authorized access by the above-cited criteria, it is additionally defined which telecommunications services can be requested via the telecommunications channel. In this way, once again transmission capacity for transmitting the information signals is saved, since different telecommunications services need not be requested by various user classes - in accordance with the above criteria - that are authorized access; instead, for each of these preselected subscriber stations, only the specified telecommunications services can be requested via this telecommunications channel. Thus only minimal service information has to be transmitted along with the information

signals.

Another advantage is that in the evaluation unit of the at least one subscriber station, the question is asked whether the access authorization data include an item of access information , which indicates whether the access authorization data include either an access threshold value or access channel information, and that the access authorization data are evaluated in accordance with the answer to the question in the at least one subscriber station. In this way, the requisite transmission capacity for transmitting the information signals can be reduced still further, because the access authorization ink include either only the access threshold value or only the access channel information, but not both together.

Still another advantage is that the access to this telecommunications channel of the at least one subscriber station is enabled as a function of the incidence of message traffic on at least one telecommunications channel. In this way, an optimal distribution of the telecommunications channel resources to the subscriber stations can be attained, with the best possible utilization of the transmission capacity.

Drawing

Exemplary embodiments of the invention are shown in the drawing and explained in further detail in the ensuing description. Fig. 1 shows a detail of a telecommunications channel;

Fig. 2 shows a block circuit diagram of a subscriber station of the invention;

Fig. 2a shows a first bit pattern for granting access to a telecommunications channel;

Fig. 3b shows a second bit pattern for granting access to a telecommunications channel;

Fig. 3c shows a third bit pattern for granting access to a telecommunications channel; and

Figs. 4a, 4b and 4c show a flow chart for the mode of operation of an evaluation unit of the subscriber station of the invention.

#### Description of the Exemplary Embodiments

In Fig. 1, reference numeral 100 indicates a base station of a telecommunications network embodied as a mobile radio network. Such a mobile radio network is normally constructed as a cellular system, and each radio cell of the mobile radio network is supplied from one base station. The base station 100 thus deploys one radio cell in the mobile radio network, in which cell, as shown in Fig. 1, a first subscriber station 5, a second subscriber station 10, a third subscriber station 15 and a fourth subscriber station 20 are disposed. The four subscriber stations 5, 10, 15, 20 are intended to be mobile stations, for instance, such as mobile phones, radio telephones, or the like. In the exemplary embodiment described here, the first subscriber station 5 is accordingly intended to be embodied as a first mobile station, the second subscriber station 10 as a second mobile station, the third subscriber station 15 as a third mobile station, and the fourth subscriber station 20 as a fourth mobile station.

A network operator of the mobile radio network offers a predetermined number of telecommunications services. As examples hereinafter, three different telecommunications services are to be offered by the network operator. As a first telecommunications service, for instance, a service for sending

small data packets can be provided, which can be employed by the mobile stations 5, 10, 15, 20 to transmit small data packets to the base station 100 via a nonselective access class 30, which is assumed hereinafter to be embodied as a RACH (random access channel), for example. As a second telecommunications service, a service for sending larger packet data can be provided, in which the RACH 30 can be used by the mobile stations 5, 10, 15, 20 to request separate data channels for packet data transmission. As a third telecommunications service, a service for speech or landline data transmission may for instance be provided, in which the RACH 30 can be used by the mobile stations 5, 10, 15, 20 to initiate or continue speech and/or data transmissions.

The three telecommunications services can be permitted individually and/or in arbitrary combination to the mobile stations 5, 10, 15, 20 by the network operator.

The telecommunications services must be requested from the network operator by the applicable mobile station via the base station 100. The telecommunications services are typically requested by the mobile stations 5, 10, 15, 20 or made accessible via the RACH 30. Via the RACH 30, messages can as a rule be sent from a plurality of mobile stations to the base station 100. Hence messages from various mobile stations can collide with one another. The base station 100 therefore confirms messages that have been properly received, by sending appropriate confirmation or acknowledgment ink over another channel, not shown in Fig. 1, such as a paging channel, back to those mobile stations whose messages it has properly received.

For the case where the message from one mobile station on the RACH 30 collides with another message, proper reception of this message does not take place in the base station 100, so that the base station 100 cannot send any confirmation ink back to the

applicable mobile station, either. After a predetermined time in which no confirmation ink was received from the base station 100, the mobile station therefore usually re-sends the message to the base station 100 via the r30. This runs the risk of overloading the r30, which thus limits the user-initiated requesting of telecommunications services by the application mobile stations because of its limited transmission capacity.

An overload on the r30 can be avoided by having the network operator restrict access to the RACH in a targeted way for the individual mobile stations 5, 10, 15, 20. The access to the RACH may for instance be permitted only for certain user classes of mobile stations either temporarily or with permanent priority. In the exemplary embodiments described in conjunction with Fig. 1, a first user class 35 is provided, which includes the first mobile station 5 and the second mobile station 10. A second user class 40 is also provided, which includes the third mobile station 15 and the fourth mobile station 20. However, it can also be provided that each mobile station be provided with its own user class. User classes with different numbers of mobile stations can also be provided. It is furthermore possible to provide more than one mobile station in one user class. The network operator can now enable access to the RACH by the individual mobile stations as a function of their membership in one of the two user classes 35, 40. This means that the two mobile stations 5, 10 of the first user class 35 are granted equal rights for transmitting on the RACH. Analogously, the mobile stations 15, 20 of the second user class 40 can be granted equal rights for transmitting on the RACH.

By means of information signals, which are transmitted from the base station 100 to the applicable mobile station 5, 10, 15, 20, the network operator informs the various mobile stations 5, 10, 15, 20 which rights for transmitting on the RACH are granted to

the applicable mobile station 5, 10, 15, 20. This will be described below in terms of the granting of rights to transmission on the RACH to the first mobile station 5 of Fig. 1, as an example for all the mobile stations 5, 10, 15, 20.

At predetermined times, the base station 100 transmits information signals to the first mobile station 5. The information signals can be transmitted, as shown in Fig. 1, via a signaling channel 25, hereinafter embodied as an example as a broadcast control channel or BCCH. With each of the information signals at the predetermined times, one bit pattern is transmitted to the first mobile station 5. In a first embodiment, the bit pattern can contain ink telling for what purpose access to the RACH is allowed, and which mobile stations are allowed access.

Among the possible purposes for access are for instance the cases already described above, such as sending small data packets, requesting a channel for larger packet data, and requesting a channel for speech/data services.

Another possible purpose for access, however, is sending signaling information from the subscriber station to the base station, ink which serves to maintain and/or modify already existing connections.

Since the bit pattern sent from the base station is sent not only to the first mobile station 5 but also to all the other mobile stations 10, 15, 20, and likewise over the signaling channel 25, which as described is embodied as a BCCH, that is, a point-to-multiple-point channel, so that all the mobile stations receive the same ink at the same time, the bit pattern includes the access rights granted to each user class 35, 40, for the sake of informing the mobile stations of the RACH access rights they have been allowed.

A random distribution of the access authorization on the r30 over some of the mobile stations 5, 10, 15, 20 is attained in that an access threshold value S is sent over the BCCH. In Fig. 2, a block circuit diagram of the first mobile station 5 is shown as an example. The first mobile station 5 includes one transceiver unit 65 with one transmitting/receiving antenna 70. The transceiver unit 65 is also connected to an evaluation unit 60, which accesses an access authorization card 75, such as a SIM card (subscriber identity module card). In Fig. 2, only the elements of the first mobile station 5 that are necessary to describe the invention are shown. The method of the invention will be described below in terms of the first mobile station 5 as an example, but the second mobile station 10, third mobile station 15 and fourth mobile station 20 have the same construction described in conjunction with Fig. 2. The first mobile station 5, by means of its transceiver unit 65, receives the information signals, which include the access threshold value S, that were transmitted over the BCCH 25. The access threshold value S is delivered to the evaluation unit 60. Before each access to the RACH 30 by the first mobile station 5, the evaluation unit 60 draws a random or pseudo-random number R and asks whether the random or pseudo-random number R is at least as great as the access threshold value S. Only then is an access to the r30 allowed. For instance, the access threshold value S is from the interval  $\{0, 1, \dots, n+1\}$ , and the random or pseudo-random number R is from the interval  $\{0, 1, \dots, n\}$ . As a result, the use of the r30 with the access threshold value  $S = n+1$  can be restricted for all the mobile stations 5, 10, 15, 20; that is, the access to the r30 can be prevented. If the random or pseudo-random number R is drawn from the corresponding interval  $\{0, 1, \dots, n\}$  by means of a uniformly distributed random function, then the probability of access to the r30 is the same for all the mobile stations 5, 10, 15, 20.

A first exemplary embodiment will now be described in

conjunction with Figs. 3a and 3b. Access authorization data 45, 50, 55 are embodied, in the first exemplary embodiment and in further exemplary embodiment, as bit patterns; the access authorization data 45, 50, 55 are transmitted along with the information signals to the mobile stations 5, 10, 15, 20, and the access authorization data 45, 50, 55 include the ink about the rights to using the r30. In the first exemplary embodiment, information signals are transmitted to each mobile station 5, 10, 15, 20 and each information signal includes one bit pattern, comprising 10 bits. A first bit is an evaluation bit S4. Fig. 3a shows the case where the evaluation bit  $S4 = 0$ . The second bit is then a first access threshold value bit S3; the third bit is a second access threshold value bit S2; the fourth bit is a third access threshold value bit S1; and the fifth bit is a fourth access threshold value bit S0. With the four access threshold value bits S3, S2, S1, S0, in this example  $2^4 = 16$  access threshold values S are transmitted by the network operator to the mobile stations 5, 10, 15, 20; via the BCCH 25, the same access threshold value S is transmitted to all the mobile stations 5, 10, 15, 20. Depending on the current incidence of message traffic in the telecommunications network, the access threshold value S can be set higher or lower, that is, can be changed or adapted. For 16 possible access threshold values S, a maximum of 16 access channels for the mobile stations 5, 10, 15, 20 can be bundled together; the membership of a mobile station 5, 10, 15, 20 in one of the 16 access classes depends on the drawing of one of 16 random or pseudo-random numbers R in the applicable evaluation unit of the mobile station 5, 10, 15, 20 and thus can change each time a new draw is done. The sixth bit in the first bit pattern 45 is a first telecommunications service bit D2; the seventh bit is a second telecommunications service bit D1, and the eighth bit is a third telecommunications service bit D0. The first telecommunications service bit D2 indicates whether the first telecommunications service can be utilized; the second telecommunications service bit D1 indicates whether the second

telecommunications service can be used; and the third telecommunications service bit D0 indicates whether the third telecommunications service can be used. It can be agreed upon that a telecommunications service is usable whenever the associated telecommunications service bit is set.

The bits 5, 10, 15, 20 can additionally be assigned to so-called priority channels 80, 85. In Fig. 1, the fourth mobile station 20 is assigned to class pd 80. In Fig. 1, the first mobile station 5 and the third mobile station 15 are assigned to a second pk 85. The second mobile station 10 in Fig. 1 is not assigned to any pk. The ninth bit of the first bit pattern 45 is a first priority bit P1, and the tenth bit of the first bit pattern 45 is a second priority bit p). Thus via the first bit pattern 45, a priority threshold value P with four different values can be transmitted to the mobile stations 5, 10, 15, 20. Therefore a maximum of four priority channels, each of different priority, can be distinguished from one another by the priority threshold value P. In Fig. 1, only two of the four possible priority channels of Fig. 3a are shown. The first pk 80 could for instance be a pk for emergency services such as the police or fire department, and could have the highest priority value 4. The second pk 85 could for instance be a pk for a city energy provider, with a somewhat lower priority value 3. If a mobile station 5, 10, 15, 20 belongs to a pk, then the associated priority value is stored in memory on the access authorization card 75 and can be detected there by the evaluation unit 60. Of the mobile stations 5, 10, 15, 20 that draw a random or pseudo-random number 4 that is greater than or equal to the access threshold value S, then only those whose priority value is also greater than or equal to the priority threshold value P then gain authorization for access to the r30. In the case of the second mobile station 10, which is not assigned to any pk, it can be provided that its evaluation unit draws one random or pseudo-random priority value from the four possible priority values and

compares the priority value it has drawn with the priority threshold value P transmitted, and gains authorization for access to the r30 if the random or pseudo-random priority value is greater than or equal to the priority threshold value P. This is on the condition that the random or pseudo-random number R drawn by the evaluation unit of the second mobile station 10 is also greater than or equal to the access threshold value S. However, it can also be provided that the mobile stations that do not belong to any pk need not perform any comparison with the priority threshold value P, but instead merely have to draw a random or pseudo-random number R that is greater than or equal to the access threshold value S, in order to be allowed access to the r30. A mobile station is not assigned to any pk whenever there is no priority value stored in memory on the inserted access authorization card 75.

It can also be provided that a predetermined priority value that corresponds to one of the four possible priority values is stored in a memory of the evaluation unit. If the evaluation unit 60 does not detect any priority value on the access authorization card 75, it can use the predetermined priority value for comparison with the priority threshold value P as described.

In Fig. 3b, a second bit pattern 50 is shown, again with a bit length of 10 bits; the layout of the second bit pattern 50 matches that of the first bit pattern 45, with the exception that the evaluation bit S4 is set to 1, and therefore the second bit, third bit, fourth bit and fifth bit of the second bit pattern 50 are no longer defined as threshold value bits but rather as access class bits. Thus the second bit of the second bit pattern 50 is a first access class bit Z3; the third bit of the second bit pattern 50 is a second access class bit Z2; the fourth bit of the second bit pattern 50 is a third access class bit Z1; and the fifth bit of the second bit pattern 50 is a fourth access class

bit Z0. The first access class bit Z3 stand for the first user  
class 35; the second access class bit Z2 stands for the second  
user class 40; the third access class bit Z1 stands for a third  
user class, not shown in Fig. 1; and the fourth access class bit  
5 Z0 stands for a fourth user class, again not shown in Fig. 1.  
The access class bits as a whole are also called access class  
ink.

10 In Fig. 1, all the mobile stations 5, 10, 15, 20 are  
assigned to the first user class 3 or the second user class 40.  
However, they can also be assigned to the third user class or the  
fourth user class, or not to any user class. If an access class  
bit in the second bit pattern 50 has the value 0, or in other  
words is not set, then all the mobile stations of the associated  
15 user class can access the r30.

20 If an access class bit of the second bit pattern 50 is set  
to 1, then no mobile station of the associated user class can  
access the r30.

25 All the mobile stations that are allowed to access the r30  
can use those telecommunications services whose associated  
telecommunications service bits in the first bit pattern 45 or  
the second bit pattern 50 are set.

30 It can also be provided that a predetermined priority value,  
which corresponds to one of the four possible priority values, is  
stored in a memory of the evaluation unit. If the evaluation  
unit 60 finds no priority value on the access authorization card  
75, then it can use the predetermined priority value for  
comparison with the priority threshold value P, as described.

35 The membership in a user class is also detected by the  
evaluation unit of the corresponding mobile station from the  
access authorization card 75. If no user class is stored in

memory on the car, then the evaluation unit of the corresponding mobile station recognizes that this mobile station does not belong to any user class.

5           If the evaluation bit S4 is set to 1, no access to the r30 is possible for mobile stations that do not belong to any user class.

10           Below an example will be described for a bit pattern whose bit length is 10 bits and which is transmitted along with the information signal. In this example, the bit sequence "to 0 1000 011 01" is sent to the mobile stations 5, 10, 15, 20 by the base station 100 via the BCCH 25. This means that the mobile stations that are assigned to a user class will be treated like mobile stations that are not assigned to any user class, since the evaluation bit S4 is not set. The access threshold value S is encoded in binary form by means of the access threshold value bits S3, S2, S1, S0, and the priority threshold value P is encoded in binary form by the priority bits P1, P0. For the access threshold value S, a value of 8 thus results, and for the priority threshold value P, a value of 1. If after P and S have been evaluated a mobile station is authorized access, then it is still allowed use of the RACH solely for channel requests for larger packet data services and for speech/data services. 25           Because of the above setting for the service ink, such mobile stations are NOT permitted to use the RACH for sending small data packets.

30           The second, third, fourth and fifth bits of the first bit pattern 45 and second bit pattern 50 represent access authorization ink, which in the first bit pattern 45 indicates the access threshold value S and in the second bit pattern 50 indicates the authorization of access for the four user classes. The first bit determines whether the second through fifth bits 35           will be interpreted in accordance with the first bit pattern 45

or the second bit pattern 50.

In a second exemplary embodiment, in Fig. 3c a third bit pattern 55 that has a bit length of 13 bits is transmitted along with the information signals from the base station 100 to the mobile stations 5, 10, 15, 20. The third bit pattern 55 has no evaluation bit S4 and therefore includes both the access threshold value bits S3, S2, S1, S0 and the access class bits Z3, Z2, Z1, Z0. In addition, like the first bit pattern 45 and the second bit pattern 50, the third bit pattern 55 includes the telecommunications service bits D2, D1, D0 and the priority bits P1, P0. Mobile stations that belong to a user class for which the associated access channel bit is 0 can access the RACH 30 regardless of the access threshold value S and the priority threshold value P, and thus optionally without their being evaluated in the evaluation unit 60. Both mobile stations that belong to a user class whose associated access channel bit is set to 1 and mobile stations that do not belong to any user class must, in order to ascertain their authorization to access the r30, must perform the access threshold value evaluation already described for the first exemplary embodiment - and optionally the priority threshold value evaluation also described in the first exemplary embodiment. The following bit sequence will be taken as an example: "1000 0110 011 01". This means that an access threshold value S = 8 has been selected; that the mobile stations of the first user class 35 and the fourth user class, not shown in Fig. 1, are allowed access to the r30 independently of any evaluation of the access threshold value S and optionally of the priority threshold value P, but the mobile stations of the second user class 40 and the third user class, not shown in Fig. 1, are not allowed to access the r30 without evaluation of the access threshold value S and optionally of the priority threshold value. For the priority threshold value P, a value of 1 results. The access-authorized mobile stations are not allowed to use the RACH to send small data packets, but they are allowed to send channel

requests for larger packet services and speech/data services over the RACH. In contrast to the first exemplary embodiment, it is possible in the second exemplary embodiment not only for mobile stations that are allowed access to the r30 by reason of their membership in a user class but also for mobile stations that draw a random or pseudo-random number R that is greater than or equal to the access threshold value S and that optionally have a priority value above the priority threshold value P to access the r30.

In comparison to the first bit pattern and the second bit pattern, in the third bit pattern the access authorization ink includes both the access threshold value bits S3, S2, S1, S0 and the access channel bits Z3, Z2, Z1, Z0.

The numbers of bits used for the access threshold value S, the access channel ink Z0, Z1, Z2, Z3, the priority threshold value P and the telecommunications service ink D0, D1, D2 are understood to be merely examples, and they can also be increased, for example for more-extensive signaling, and reduced, for the sake of bandwidth reduction. In this case, the total length of the bit patterns 45, 50, 55 may change as well. Individual components of the ink can optionally also be omitted entirely.

Figs. 4a, 4b, and 4c show a flow chart for the mode of operation of the evaluation unit 60. At a program point 200, the evaluation unit 60 asks the question whether the information signals received over the BCCH 25 include a bit pattern having the bit length of 10 bits. If so, the next step is a program point 205; if not, the next step is a program point 280. At program point 205, the evaluation unit 60 asks whether the evaluation bit  $S_4 = 0$ . If so, the next step is a program point 210; if not, it is a program point 230. At program point 210, from the access threshold values S3, S2, S1, S0, the evaluation unit 60 ascertains the access threshold value S and draws a

random or pseudo-random number R from the set of possible access threshold values S; the largest possible access threshold value S can be excepted from the drawing of the random or pseudo-random number R. The next step is a program point 215. At program point 215, the evaluation unit 60 asks whether the random or pseudo-random number R is greater than or equal to the access threshold value S. If so, the next step is a program point 220; if not, an exit is made from the program. At program point 220, the evaluation unit 60 asks whether a priority value of an assigned pk is stored in memory on the access authorization card 75. If so, the next step is a program point 225; if not, it is a program point 290. At program point 290, the evaluation unit 60 asks whether a predetermined priority value is stored in a memory assigned to the evaluation unit. If so, the next step is program point 225; if not, it is a program point 245. At program point 225, the evaluation unit 50 ascertains the priority threshold value P from the bit pattern received. The next step is a program point 240. At program point 240, the evaluation unit 60 asks whether the priority value is greater than or equal to the priority threshold value P. If so, the next step is program point 245; if not, the program is exited. At program point 245, from the telecommunications service bits from the bit pattern, the evaluation unit 60 ascertains what the usable telecommunications services are. The next step is a program point 250. At program point 250, the evaluation unit 60 enables access to the r30 by the associated mobile station for using the usable telecommunications service. Next, the program is exited. At program point 230, the evaluation unit 60 asks whether the membership in a user class is stored in memory on the access authorization card 75. If so, the next step is a program point 235; if not, the program is exited. At program point 235, from the access channel bits, the evaluation unit 60 asks whether the mobile station user class ascertained from the access authorization card 78 is allowed access to the r30. If so, the next step is program point 245; if not, the program is exited.

At program point 280, the evaluation unit 60 has detected that a bit pattern with the bit length of 13 bits has been received, and it asks whether a membership of the associated mobile station in a user class is stored in memory on the access authorization card 75. It is also asked, at program point 280, whether the user class belongs to a first group of user classes or to a second group of user classes. The first group of user classes will be referred to hereinafter as normally privileged. The second group of user classes will be referred to hereinafter as preferentially authorized. If it is detected at program point 280 that a membership of the associated mobile station in the preferentially authorized user class exists on the access authorization card 75, then the program moves to program point 285. If not, that is, if no membership of the mobile station in a user class is detected on the access authorization card 75, or if the normally privileged user class is detected, then the program moves to program point 210. If that is the case, the next step is a program point 285, and if not, it is a program point 210. At program point 285, on the basis of the access channel bits at Z3, Z2, Z1, Z0 of the bit pattern received, the evaluation unit 60 asks whether the user class ascertained for the mobile station is authorized access to the r30. If so, the next step is program point 245; if not, it is program point 210.

In all cases where the program is not exited from program point 250, the evaluation unit 50 will have found no allowed access to the r30 for the associated mobile station 5. After the end of the program, the mobile station informs the user that the access to the r30 was not possible, and waits for further inputs from the user. Alternatively, by means of a waiting loop embodied in the mobile station, the program is executed over again, so there is a wait for the next information signal with the next bit pattern, and the information signal is then evaluated to ascertain the ab to the r30.

The information signals are transmitted from the base station 100 to the mobile station 5, 10, 15, 20 are predetermined times, preferably at regular intervals. The network operator can, by the method described, either permit or block access to the RACH as a function of the incidence of message traffic in the telecommunications network and thus as a function of an expected utilization of the r30 for the individual mobile stations 5, 10, 15, 20. Since the incidence of message traffic in the telecommunications network varies over time, the expected utilization of the r30 also varies over time, so that by means of the correspondingly changed bit pattern allocation, access to the RACH is as a rule allocated to the various mobile stations 5, 10, 15, 20 at different times.

A relief of the r30 can additionally be attained by providing a repetition counter and/or a repeat interval. The repetition attempts allowed for re-sending a message from the corresponding mobile station to the base station 100 over the r30, in the event of collision with a message from another mobile station. The repeat interval is a stochastic measure of the time interval until the next repetition of the message sent over the r30 from the applicable mobile station to the base station 100. The lower the number of repeat attempts allowed, and the greater the repeat interval, the greater the relief of the r30. Together with the bit pattern of the access rights granted, the repetition counter and/or the repeat interval can be imparted to the applicable mobile stations at regular time intervals over the associated signaling channel 25, optionally along with other radio-cell-specific ink. The method of the invention can be achieved in a mobile radio network by the UMTS (Universal Mobile Telecommunication System) standard, the GSM standard, or the like.

The method of the invention is not limited to use in a mobile radio network, but instead can be employed generally in

telecommunications networks in which there is a  
telecommunications channel that is used by a plurality of  
subscriber stations to request telecommunications services and/or  
to send data packets; the telecommunications network can for  
instance also be a fixed landline network.

In another version, it can also be provided that for an  
authorization of access, the prerequisite is a random or pseudo-  
random number  $R$  less than the access threshold value  $\alpha$ .

Correspondingly, for the priority checking by means of the  
priority threshold value  $P$ , it can be a prerequisite that the  
random or pseudo-random number  $R$  is less than the priority  
threshold value  $P$ .

## Claims

1. A method for allocating rights of access to at least one telecommunications channel of a telecommunications network to at least one subscriber station (5, 10, 15, 20) of the telecommunications network, in which information signals are transmitted to the at least one subscriber station (5, 10, 15, 20), characterized in that with the information signals, access authorization data (45, 50, 55) are transmitted to the at least one subscriber station (5, 10, 15, 20); that upon reception of the access authorization data (45, 50, 55) in an evaluation unit (6) of the at least one subscriber station (5, 10, 15, 20), the question is asked whether the access authorization data (45, 50, 55) include an access threshold value (S), and the access threshold value (S) is compared with a random number or a pseudo-random number (R); and that the right of access to a telecommunications channel of the at least one subscriber station (5, 10, 15, 20) is granted as a function of the outcome of comparison, preferably on the condition that the random number or the pseudo-random number (R) is greater than or equal to the access threshold value (S).

2. The method of claim 1, characterized in that in the evaluation unit of the at least one subscriber station (5, 10, 15, 20), the question is asked whether the access authorization data (45, 50, 55) include access authorization information (S0, S1, S2, S3, S4, Z0, Z1, Z2, Z3) with access class information (Z0, Z1, Z2, Z3) for at least one predetermined user class (35, 40), in which case, and on the condition that the at least one subscriber station (5, 10, 15, 20) is assigned to the at least one predetermined user class (35, 40), to which access to at least one telecommunications channel of the at least one subscriber station (5, 10, 15, 20) is granted as a function of the access class information (Z0, Z1, Z2, Z3) for this user class (35, 40).

3. The method of claim 1 or 2, characterized in that in the evaluation unit (60), of the at least one subscriber station (5, 10, 15, 20), the question is asked whether the access authorization data (45, 50, 55) include priority information in the form of priority threshold value (P), in which case and on the condition that the at least one subscriber station (5, 10, 15, 20) is assigned to a pk (80, 85) with a priority value, the priority value is compared with the priority threshold value (P), and the access to a telecommunications channel of the at least one subscriber station (5, 10, 15, 20) is granted as a function of the outcome of the comparison, preferably on the condition that the priority value is greater than or equal to the priority threshold value (P).

4. The method of claim 1, 2 or 3, characterized in that in the evaluation unit (60) of the at least one subscriber station (5, 10, 15, 20), the question is asked whether the access authorization data (45, 50, 55) include telecommunications service information (D0, D1, D2), which for telecommunications services offered by the telecommunications network indicate whether the access to at least one telecommunications channel for use, or the request for such a telecommunications service, is enabled.

5. The method of one of the foregoing claims, characterized in that in the evaluation unit (60) of the at least one subscriber station (5, 10, 15, 20), the question is asked whether the access authorization data (45, 50, 55) include an item of access information (S4), which indicates whether the access authorization data (45, 50, 55) are evaluated as an access threshold value (S), as access channel information (Z0, Z1, Z2, Z3), as a priority threshold value (P), and/or as telecommunications service information (D0, D1, D2).

6. The method of one of the foregoing claims, characterized in

that in the evaluation unit (60) of the at least one subscriber station (5, 10, 15, 20), the question is asked whether the access authorization data (45, 50, 55) include an item of access information (S4), which indicates whether the access authorization data (45, 50, 55) include either an access threshold value (S) or access channel information (Z0, Z1, Z2, Z3), and that the access authorization data (45, 50, 55) are evaluated in accordance with the answer to the question in the at least one subscriber station (5, 10, 15, 20).

7. The method of one of the foregoing claims, characterized in that the access authorization data (45, 50, 55) are transmitted as bit patterns (45, 50, 55).

8. The method of one of the foregoing claims, characterized in that the at least one telecommunications channel at least partly comprises a nonselective access class (30).

9. The method of one of the foregoing claims, characterized in that the information signals are transmitted to the at least one subscriber station (5, 10, 15, 20) via at least one signaling channel (25).

10. The method of one of the foregoing claims, characterized in that the access to at least one telecommunications channel of the at least one subscriber station (5, 10, 15, 20) is enabled as a function of the incidence of message traffic on at least one telecommunications channel.

11. A subscriber station (5, 10, 15, 20), to which the access to at least one telecommunications channel can be granted, in which information signals are transmitted to the at least one subscriber station (5, 10, 15, 20), characterized in that an evaluation unit (60) is provided, to which the information

signals with access authorization data (45, 50, 55) are delivered; that the evaluation unit (6) of the at least one subscriber station (5, 10, 15, 20), upon reception of the access authorization data (S0, S1, S2, S3, S4, Z0, Z1, Z2, Z3 D0, D1, D2, P0, P1) asks whether the access authorization data (45, 50, 55) include an access threshold value (S); that the evaluation unit (50) compares the access threshold value (S) with a random number or a pseudo-random number (R); and that as a function of the outcome of the comparison, in particular on the condition that the random number or the pseudo-random number (R) is greater than or equal to the access threshold value (S), the evaluation unit (60) ascertains whether the access of the at least one subscriber station (5, 10, 15, 20) to the at least one telecommunications channel is enabled.

METHOD FOR ALLOCATING RIGHTS OF ACCESS TO A TELECOMMUNICATIONS  
CHANNEL TO SUBSCRIBER STATIONS OF A TELECOMMUNICATIONS NETWORK,  
AND SUBSCRIBER STATION

5






Abstract

10

15

20

A method and a subscriber station for allocating rights of access to a telecommunications channel of the telecommunications network to at least one subscriber station (5, 10, 15, 20) are proposed, in which information signals are transmitted to the at least one subscriber station (5, 10, 15, 20). With the information signals, access authorization data (45, 50, 55) are transmitted to the at least one subscriber station (5, 10, 15, 20). Upon reception of the access authorization data (45, 50, 55) in an evaluation unit (6) of the at least one subscriber station (5, 10, 15, 20), the question is asked whether the access authorization data (45, 50, 55) include an access threshold value (S), and the access threshold value (S) is compared with a random number or a pseudo-random number (R), and the right of access to a telecommunications channel of the at least one subscriber station (5, 10, 15, 20) is granted as a function of the outcome of comparison.

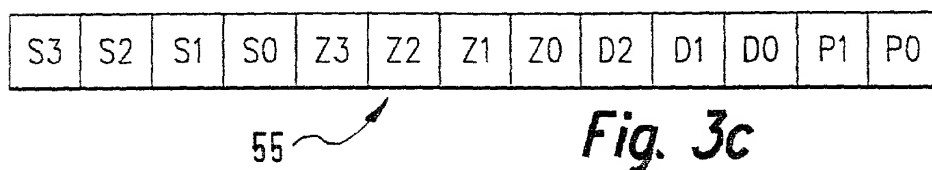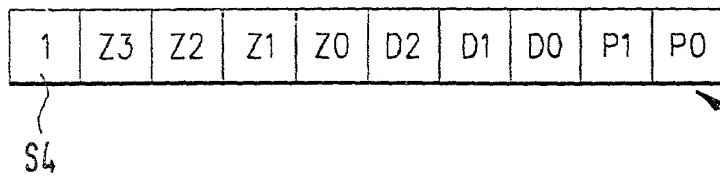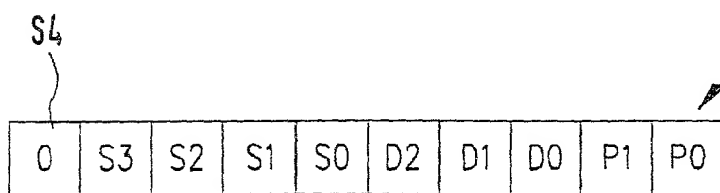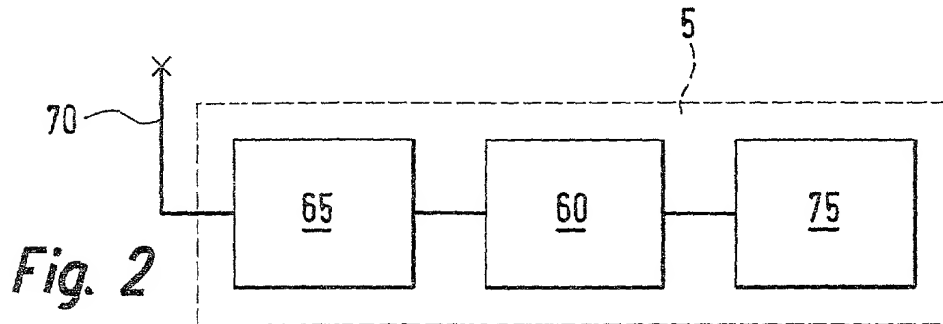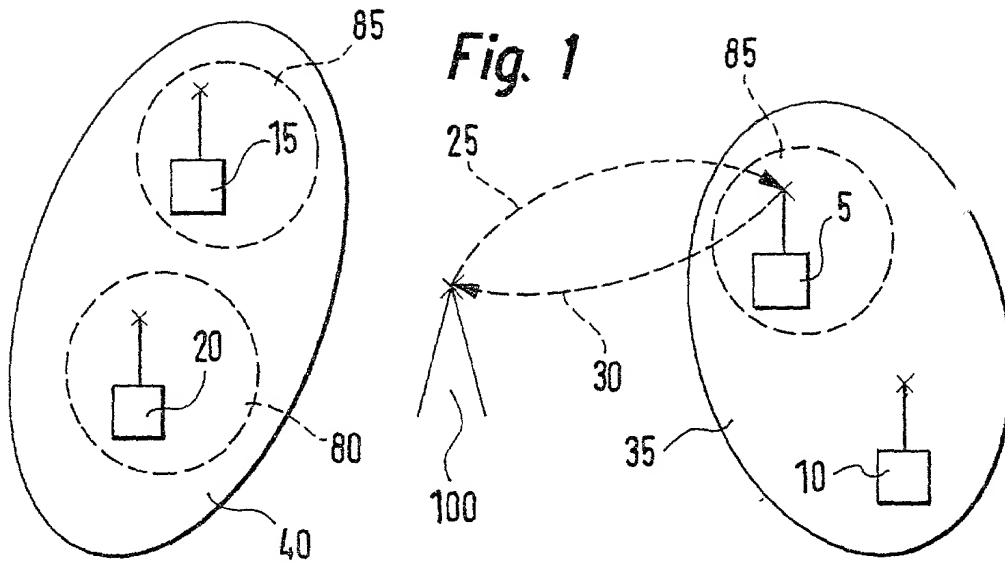

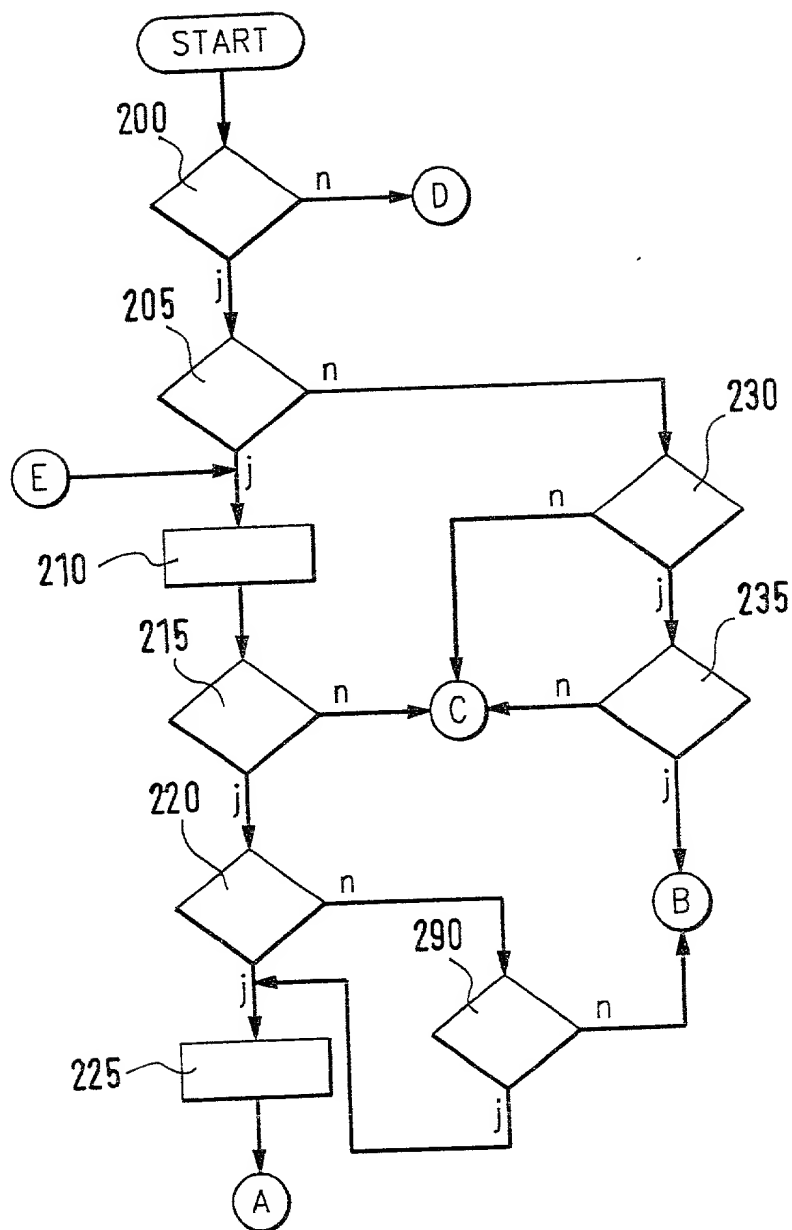


Fig. 4a

Fig. 4b


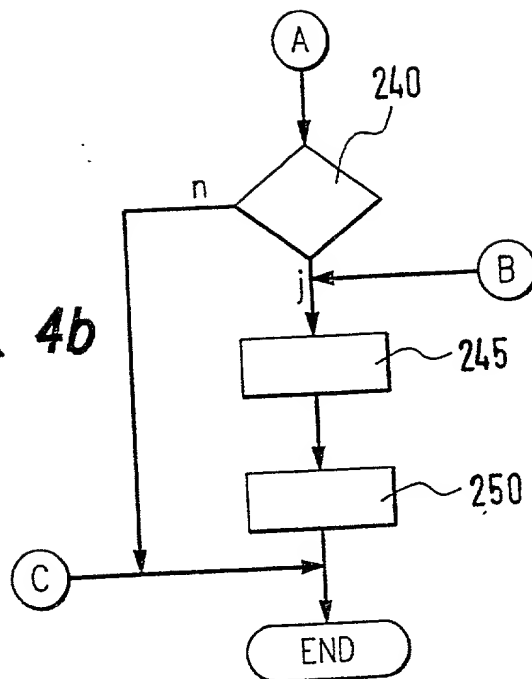


Fig. 4c

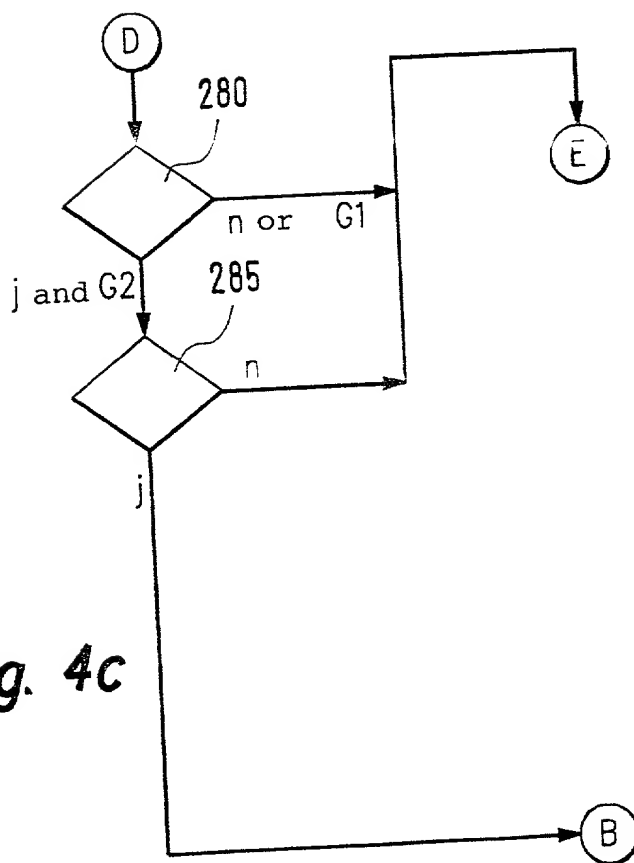

**DECLARATION AND POWER OF ATTORNEY FOR NATIONAL STAGE OF PCT PATENT APPLICATION**

As a below-named inventor, I hereby declare that:

Ralf FISCHER  
 Martin HANS  
 Frank KOWALEWSKI  
 Josef LAUMEN

Gunnar SCHMIDT  
 Detlef LECHNER  
 Holger SCHULZ

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD FOR ALLOCATING RIGHTS OF ACCESS TO A TELECOMMUNICATIONS CHANNEL TO SUBSCRIBER STATIONS OF A TELECOMMUNICATIONS NETWORK, AND SUBSCRIBER STATION** the specification of which was filed as PCT International Application number PCT/DE 00/00431 on February 15, 2000.

I hereby state that I believe the named inventor or inventors in this Declaration to be the original and first inventor or inventors of the subject matter which is claimed and for which a patent is sought.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365 (b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior foreign application(s):

Priority claimed:

<u>199 10 239.2</u>	<u>GERMANY</u>	<u>MARCH 8, 1999</u>	<u>X</u>	
(Number)	(Country)	(Date filed)	Yes	No
<u>                    </u>	<u>                    </u>	<u>                    </u>	<u>                    </u>	<u>                    </u>
(Number)	(Country)	(Date filed)	Yes	No

As a named inventor, I hereby appoint the following attorney to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:








| Michael J. Striker, Reg. No. 27233

Direct all telephone calls to Striker, Striker & Stenby at telephone no.: (631) 549 4700 and address and all correspondence to:

STRIKER, STRIKER & STENBY  
103 East Neck Road -  
Huntington, New York 11743  
U.S.A.

I hereby declare that all statements made herein of my own knowledge are true and that all statements

made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statement may jeopardize the validity of the application or any patent issued thereon.

Signature: 	Date: x 24.7.01	Residence and Full Postal Address: Vor Dem Eichberg 10 31162 Bad Salzdetfurth <u>DEX</u>
Full Name of First or Sole Inventor: Ralf FISCHER	Citizenship: GERMAN	
Signature: 	Date: x 26.7.01	Residence and Full Postal Address: Spandauer Weg 9 31141 Hildesheim <u>DEX</u>
Full Name of Second Inventor: Martin HANS	Citizenship: GERMAN	
Signature: 	Date: 26.7.01	Residence and Full Postal Address: Schierke 16 38228 Salzgitter <u>DEX</u>
Full Name of Third Inventor: Frank KOWALEWSKI	Citizenship: GERMAN	
Signature: 	Date: 30.07.01	Residence and Full Postal Address: <del>Hansring 56</del> <u>Widernstr. 29B</u> 31141 Hildesheim <u>DEX</u>
Full Name of Fourth Inventor: Josef LAUMEN	Citizenship: GERMAN	
Signature: 	Date: 30.07.01	Residence and Full Postal Address: Ziegenberg 6 38304 Wolfenbuettel <u>DEX</u>
Full Name of Fifth Inventor: Gunnar SCHMIDT	Citizenship: GERMAN	
Signature: 	Date: 25.07.01	Residence and Full Postal Address: Rumeyplan 3 12101 Berlin-Tempelhof <u>DEX</u>
Full Name of Sixth Inventor: Detlef LECHNER	Citizenship: GERMAN	
Signature: 	Date: x 4.08.01	Residence and Full Postal Address: Schlossstrasse 37 14059 Berlin Germany
Full Name of Seventh Inventor: Holger SCHULZ	Citizenship: GERMAN	